


## BELDEN CATEGORY 5E DATA CABLE Stranded conductor - Deployable

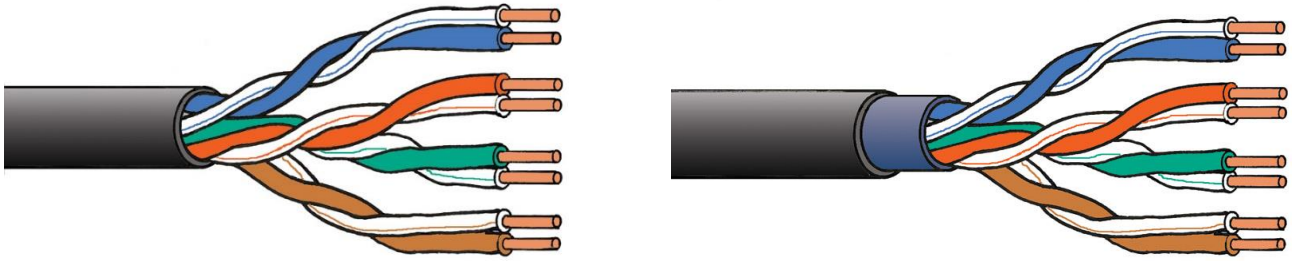

60-1304A BELDEN 1304A CABLE Black

60-1305A BELDEN 1305A CABLE Black

These Category 5E U/UTP (unscreened) cables, designed for deployable applications, have stranded conductors, bonded pairs, and overall soft PVC jackets. Subtle differences between the cables with the thickness of the outer jacket being the primary variant. Available cut to length in any multiple of 1 metre.

### Technical Specifications:

Conductors: 7/0.203mm (7 x 32AWG) plain copper (24AWG)

Insulation: O.D. 1.04mm (1304A), Polyolefin, according to CW1308 colour code  
O.D. 1.09mm (1305A), Polyolefin, according to CW1308 colour code

Lay-up: Two insulated conductors twisted & bonded together, 4 pairs twisted together

Overall jacket: O.D. 6.22mm (1304A), Soft PVC, matt black  
O.D. 7.49mm outer, O.D. 6.04mm inner (1305A), Soft PVC, matt black

Impedance: 100 ohms +/- 15 ohms

Weight: 4.13kg/100m (1304A)  
5.93kg/100m (1305A)

Reel length: 305m

Cut lengths: Available in any multiple of 1 metre

Standard RJ45 free connectors will not accommodate the oversized core insulation.

As a result the following may need to be considered:

NSR-XXXXX TUK PXCAT6S8XL CAT6/6A plug for XL cables

NSR-XXXXX TUK PS2bk8 cable boot, Black